


Package A



TERMINAL CODE

- 1 VUPC
- 2 VFO
- 3 UP
- 4 VUP1
- 5 VPC
- 6 VFO
- 7 VP
- 8 VVP1
- 9 NC
- 10 NC
- 11 NC
- 12 NC
- 13 VNC
- 14 VN1
- 15 NC
- 16 UN
- 17 VN
- 18 NC
- 19 FO

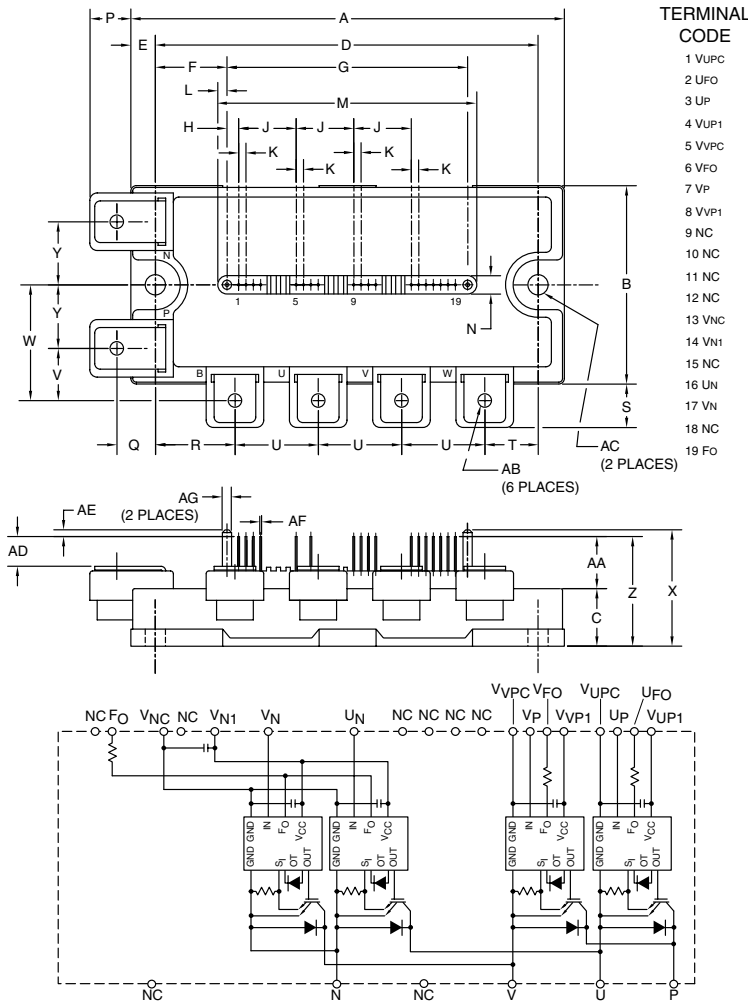

Description:

Powerex Intellimod™ 5th generation PV-IPMs are isolated base modules designed for power switching applications operating at frequencies to 30kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free-wheel diode power devices.

Features:

- Complete Output Power Circuit
- Gate Drive Circuit
- Protection Logic
 - Short Circuit
 - Over Temperature Using On-chip Temperature Sensing
 - Under Voltage
- Low Loss Using 5th Generation IGBT Chip

Applications:

- PV Inverters
- PV UPS
- PV Power Supplies

Ordering Information:

Example: Select the complete part number from the table below -i.e. PM75B4LA060 (Package A) is a 600V, 75 Ampere PV-IPM.

| Type | Current Rating Amperes | V _{CEs} Volts (x 10) |
|------|---------------------------|----------------------------------|
| PM | 75 | 60 |

Outline Drawing and Circuit Diagram

| Dimensions | Inches | Millimeters |
|------------|--------|-------------|
| A | 4.72 | 120.0 |
| B | 2.17 | 55.0 |
| C | 0.63 | 16.0 |
| D | 4.17 | 106.0 |
| E | 0.28 | 7.0 |
| F | 0.78 | 19.75 |
| G | 2.62 | 66.5 |
| H | 0.13 | 3.25 |
| J | 0.63 | 16.0 |
| K | 0.08 | 2.0 |
| L | 0.10 | 2.5 |
| M | 2.81 | 71.5 |
| N | 0.20 | 5.0 |
| P | 0.43 | 11.0 |
| Q | 0.42 | 10.75 |
| R | 0.87 | 22.0 |


| Dimensions | Inches | Millimeters |
|------------|-----------|-------------|
| S | 0.46 | 11.75 |
| T | 0.59 | 15.0 |
| U | 0.91 | 23.0 |
| V | 0.57 | 14.5 |
| W | 1.26 | 32.0 |
| X | 1.22 | 31.0 |
| Y | 0.69 | 17.5 |
| Z | 1.14 | 29.0 |
| AA | 0.51 | 13.0 |
| AB | M5 Metric | M5 |
| AC | 0.22 Dia. | Dia. 5.5 |
| AD | 0.28 | 7.0 |
| AE | 0.08 | 2.0 |
| AF | 0.02 Sq. | Sq. 0.5 |
| AG | 0.10 Dia. | Dia. 2.5 |

PM75B4LA060 / PM75B4LB060

Photo Voltaic IPM


H-Bridge

75 Amperes/600 Volts

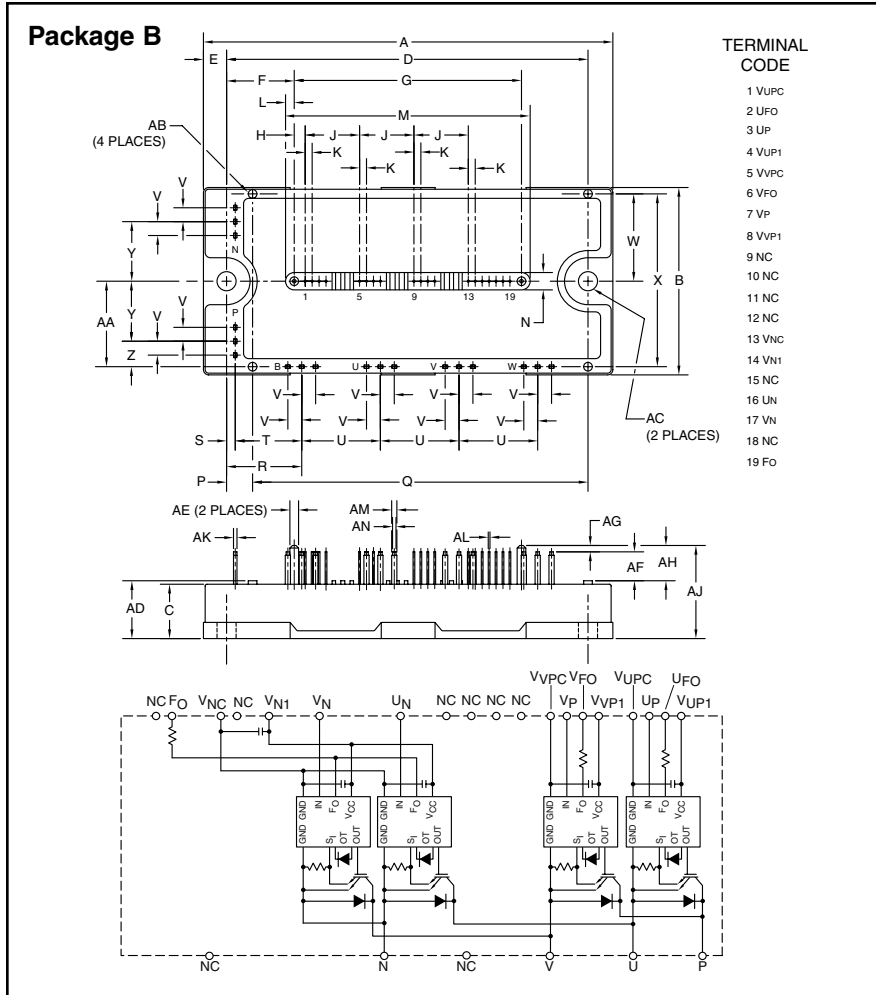

TERMINAL CODE

- 1 VUPC
- 2 UFO
- 3 UP
- 4 VUP1
- 5 VVPC
- 6 VFO
- 7 VP
- 8 VVP1
- 9 NC
- 10 NC
- 11 NC
- 12 NC
- 13 VNC
- 14 VN1
- 15 NC
- 16 UN
- 17 VN
- 18 NC
- 19 FO

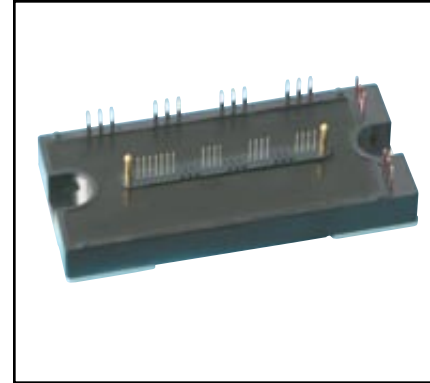

Description:

Powerex Intellimod™ 5th generation PV-IPMs are isolated base modules designed for power switching applications operating at frequencies to 30kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free-wheel diode power devices.

Features:

- Complete Output Power Circuit
- Gate Drive Circuit
- Protection Logic
 - Short Circuit
 - Over Temperature
 - Using On-chip Temperature Sensing
 - Under Voltage
- Low Loss Using 5th Generation IGBT Chip

Applications:

- PV Inverters
- PV UPS
- PV Power Supplies

Ordering Information:

Example: Select the complete part number from the table below -i.e. PM75B4LB060 (Package B) is a 600V, 75 Ampere PV-IPM.

| Type | Current Rating Amperes | V _{CES} Volts (x 10) |
|------|---------------------------|----------------------------------|
| PM | 75 | 60 |

Outline Drawing and Circuit Diagram

| Dimensions | Inches | Millimeters |
|------------|--------|-------------|
| A | 4.72 | 120.0 |
| B | 2.17 | 55.0 |
| C | 0.63 | 16.0 |
| D | 4.17 | 106.0 |
| E | 0.28 | 7.0 |
| F | 0.78 | 19.75 |
| G | 2.62 | 66.5 |
| H | 0.13 | 3.25 |
| J | 0.63 | 16.0 |
| K | 0.08 | 2.0 |
| L | 0.10 | 2.5 |
| M | 2.81 | 71.5 |
| N | 0.20 | 5.0 |
| P | 0.31 | 7.75 |
| Q | 3.87 | 98.25 |
| R | 0.87 | 22.0 |
| S | 0.10 | 2.5 |
| T | 0.77 | 19.5 |
| U | 0.91 | 23.0 |

| Dimensions | Inches | Millimeters |
|------------|-----------|-------------|
| V | 0.16 | 4.0 |
| W | 1.01 | 25.75 |
| X | 2.00 | 50.75 |
| Y | 0.69 | 17.5 |
| Z | 0.30 | 7.5 |
| AA | 0.98 | 25.0 |
| AB | 0.10 Dia. | Dia. 2.5 |
| AC | 0.22 Dia. | Dia. 5.5 |
| AD | 0.67 | 17.0 |
| AE | 0.10 Dia. | Dia. 2.5 |
| AF | 0.33 | 8.5 |
| AG | 0.08 | 2.0 |
| AH | 0.41 | 10.5 |
| AJ | 1.08 | 27.5 |
| AK | 0.04 | 1.0 |
| AL | 0.02 Sq. | Sq. 0.5 |
| AM | 0.06 | 1.5 |
| AN | 0.04 | 1.0 |



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PM75B4LA060 / PM75B4LB060

Photo Voltaic IPM

H-Bridge

75 Amperes/600 Volts

Absolute Maximum Ratings, $T_j = 25^\circ\text{C}$ unless otherwise specified

| Characteristics | Symbol | PM75B4LA060 / PM75B4LB060 | Units |
|--|------------------------|---------------------------|------------------|
| Power Device Junction Temperature | T_j | -20 to 150 | $^\circ\text{C}$ |
| Storage Temperature | T_{stg} | -40 to 125 | $^\circ\text{C}$ |
| Module Case Operating Temperature (Note 1) | T_C | -20 to 100 | $^\circ\text{C}$ |
| Mounting Torque, M5 Mounting Screws | — | 31 | in-lb |
| Mounting Torque, M5 Main Terminal Screws (Package A only) | — | 31 | in-lb |
| Package A Module Weight (Typical) | — | 380 | Grams |
| Package B Module Weight (Typical) | — | 340 | Grams |
| Supply Voltage, Surge (Applied between P-N) | $V_{\text{CC(surge)}}$ | 500 | Volts |
| Operation of Short Circuit Protections (Applied between P-N, $V_D = 13.5 \sim 16.5\text{V}$, Inverter Part, $T_j = 125^\circ\text{C}$ Start) | $V_{\text{CC(prot.)}}$ | 400 | Volts |
| Isolation Voltage, AC 1 minute, 60Hz Sinusoidal | V_{ISO} | 2500 | Volts |

IGBT Inverter Part

| | | | |
|--|---------------------|-----|---------|
| Collector-Emitter Voltage ($V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$) | V_{CES} | 600 | Volts |
| Collector Current ($T_C = 25^\circ\text{C}$) | $\pm I_C$ | 75 | Amperes |
| Peak Collector Current ($T_C = 25^\circ\text{C}$) | $\pm I_{\text{CP}}$ | 150 | Amperes |
| Collector Dissipation ($T_C = 25^\circ\text{C}$) (Note 1) | P_C | 390 | Watts |

Control Part

| | | | |
|---|------------------|----|-------|
| Supply Voltage (Applied between $V_{\text{UP1}}-V_{\text{UPC}}$, $V_{\text{VP1}}-V_{\text{VPC}}$, $V_{\text{N1}}-V_{\text{NC}}$) | V_D | 20 | Volts |
| Input Voltage (Applied between U_P-V_{UPC} , V_P-V_{VPC} , $U_N-V_N-V_{\text{NC}}$) | V_{CIN} | 20 | Volts |
| Fault Output Supply Voltage (Applied between $U_{\text{FO}}-V_{\text{UPC}}$, $V_{\text{FO}}-V_{\text{VPC}}$, F_O-V_{NC}) | V_{FO} | 20 | Volts |
| Fault Output Supply Current (Sink Current at U_{FO} , V_{FO} , F_O Terminals) | I_{FO} | 20 | mA |

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

| Characteristics | Symbol | Test Conditions | Min. | Typ. | Max. | Units |
|--------------------------------------|----------------------|---|------|------|------|---------------|
| Collector-Emitter Saturation Voltage | $V_{\text{CE(sat)}}$ | $V_D = 15\text{V}$, $V_{\text{CIN}} = 0\text{V}$, $I_C = 75\text{A}$, Pulsed, $T_j = 25^\circ\text{C}$ | — | 1.7 | — | Volts |
| | | $V_D = 15\text{V}$, $V_{\text{CIN}} = 0\text{V}$, $I_C = 75\text{A}$, Pulsed, $T_j = 125^\circ\text{C}$ | — | 1.55 | — | Volts |
| Diode Forward Voltage | V_{EC} | $-I_C = 75\text{A}$, $V_{\text{CIN}} = 15\text{V}$, $V_D = 15\text{V}$ | — | 2.2 | 3.3 | Volts |
| Inductive Load Switching Times | t_{on} | | 0.3 | 0.7 | 2.1 | μs |
| | t_{rr} | $V_D = 15\text{V}$, $V_{\text{CIN}} = 0 \leftrightarrow 15\text{V}$ | — | 0.1 | 0.3 | μs |
| | $t_{\text{C(on)}}$ | $V_{\text{CC}} = 300\text{V}$, $T_j = 125^\circ\text{C}$, $I_C = 75\text{A}$ | — | 0.2 | 0.8 | μs |
| | t_{off} | Inductive Load (Per 1 Arm) | — | 0.9 | 2.2 | μs |
| | $t_{\text{C(off)}}$ | | — | 0.2 | 0.7 | μs |
| Collector-Emitter Cutoff Current | I_{CES} | $V_{\text{CE}} = V_{\text{CES}}$, $V_{\text{CIN}} = 15\text{V}$, $T_j = 25^\circ\text{C}$ | — | — | 1.0 | mA |
| | | $V_{\text{CE}} = V_{\text{CES}}$, $V_{\text{CIN}} = 15\text{V}$, $T_j = 125^\circ\text{C}$ | — | — | 10 | mA |



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PM75B4LA060 / PM75B4LB060

Photo Voltaic IPM

H-Bridge

75 Amperes/600 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

| Characteristics | Symbol | Test Conditions | Min. | Typ. | Max. | Units |
|---|---------------|---|------|------|------|------------------|
| Control Part | | | | | | |
| Control Supply Voltage | V_D | Applied between $V_{UP1}-V_{UPC}, V_{VP1}-V_{VPC}, V_{N1}-V_N$ | 13.5 | 15.0 | 16.5 | Volts |
| Circuit Current | I_D | $V_D = 15\text{V}, V_{CIN} = 15\text{V}, V_{N1}-V_{NC}$ | — | 15 | 25 | mA |
| | | $V_D = 15\text{V}, V_{CIN} = 15\text{V}, V_{XP1}-V_{XPC}$ | — | 5 | 10 | mA |
| Input ON Threshold Voltage | $V_{th(on)}$ | Applied between U_P-V_{UPC} , | 1.2 | 1.5 | 1.8 | Volts |
| Input OFF Threshold Voltage | $V_{th(off)}$ | $V_P-V_{VPC}, U_N- V_N- W_N-Br-V_{NC}$ | 1.7 | 2.0 | 2.3 | Volts |
| Short Circuit Trip Level* | SC | Inverter Part | 150 | — | — | Amperes |
| Short Circuit Current Delay Time | $t_{off(SC)}$ | $V_D = 15\text{V}$ | — | 0.2 | — | μs |
| Over Temperature Protection** ($V_D = 15\text{V}$) | OT | Trip Level | 135 | 145 | — | $^\circ\text{C}$ |
| | OT_r | Reset Level | — | 125 | — | $^\circ\text{C}$ |
| Supply Circuit Under-voltage Protection ($T_j \leq 125^\circ\text{C}$) | UV | Trip Level | 11.5 | 12.0 | 12.5 | Volts |
| | UV_r | Reset Level | — | 12.5 | — | Volts |
| Fault Output Current** | $I_{FO(H)}$ | $V_D = 15\text{V}, V_{FO} = 15\text{V}$ | — | — | 0.01 | mA |
| | $I_{FO(L)}$ | $V_D = 15\text{V}, V_{FO} = 15\text{V}$ | — | 10 | 15 | mA |
| Fault Output Pulse Width** | t_{FO} | $V_D = 15\text{V}$ | 1.0 | 1.8 | — | ms |

* $-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}, V_D = 15\text{V}$, Inductive Load per 1 Arm

**Fault output is given only when the internal SC, OT and UV protections schemes of either upper or lower device operate to protect it.

Fault output of SC protection given pulse. Fault output of OT, UV protection given pulse while over trip level.

Thermal Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

| Characteristic | Symbol | Condition | Min. | Typ. | Max. | Units |
|-------------------------------------|----------------|--|------|------|-------|-----------------------|
| Junction to Case Thermal Resistance | $R_{th(j-c)Q}$ | Inverter IGBT (Per 1 Element) (Note 1) | — | — | 0.32 | $^\circ\text{C/Watt}$ |
| | $R_{th(j-c)D}$ | Inverter FWDi (Per 1 Element) (Note 1) | — | — | 0.53 | $^\circ\text{C/Watt}$ |
| Contact Thermal Resistance | $R_{th(c-f)}$ | Case to Fin (Per 1 Element), Thermal Grease Applied | — | — | 0.038 | $^\circ\text{C/Watt}$ |

Recommended Conditions for Use

| Characteristic | Symbol | Condition | Value | Units |
|---------------------------------|----------------|--|----------------|---------------|
| Supply Voltage | V_{CC} | Applied across P-N Terminals | ≤ 400 | Volts |
| Control Supply Voltage | V_D | Applied between $V_{UP1}-V_{UPC},$ $V_{VP1}-V_{VPC}, V_{N1}-V_{NC}$ | 15.0 ± 1.5 | Volts |
| Input ON Voltage | $V_{CIN(on)}$ | Applied between $U_P-V_{UPC},$ | ≤ 0.8 | Volts |
| Input OFF Voltage | $V_{CIN(off)}$ | $V_P-V_{VPC}, U_N- V_N-V_{NC}$ | ≥ 9.0 | Volts |
| PWM Input Frequency | f_{PWM} | Using Application Circuit | ≤ 30 | kHz |
| Arm Shoot-through Blocking Time | t_{DEAD} | Using Application Circuit of IPM's Input Signal of Each Arm | ≥ 2.0 | μs |












Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PM75B4LA060 / PM75B4LB060

Photo Voltaic IPM

H-Bridge

75 Amperes/600 Volts

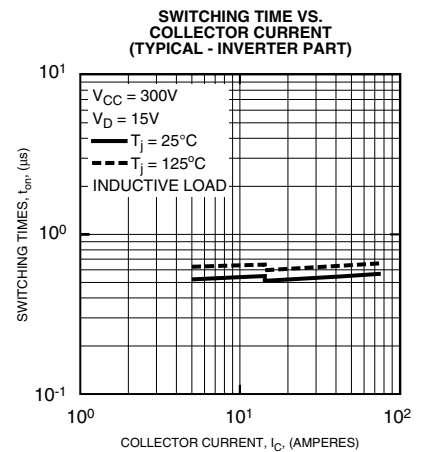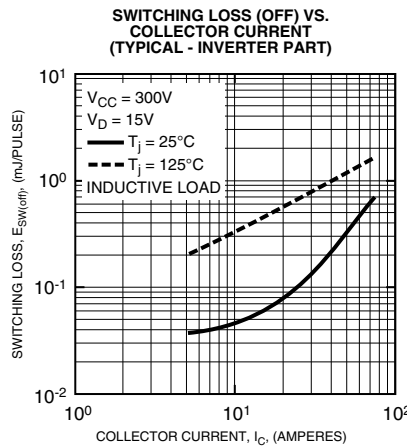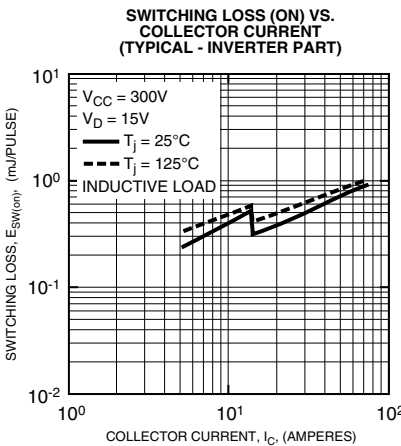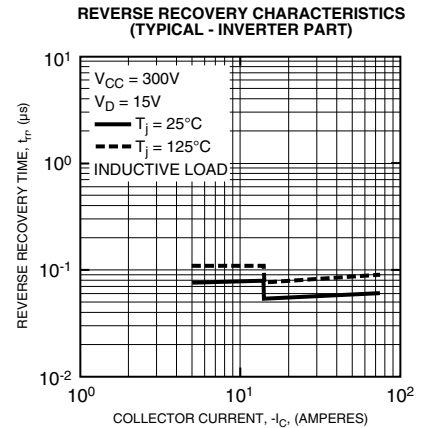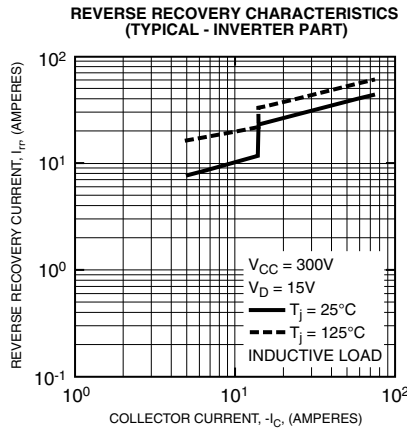
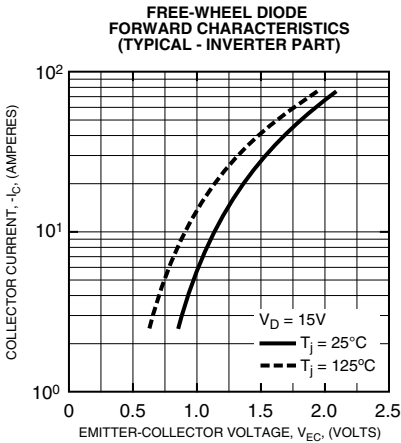
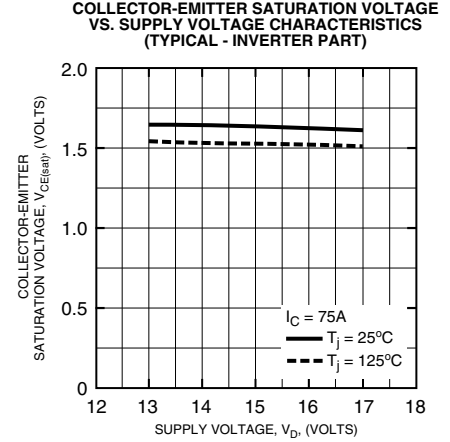
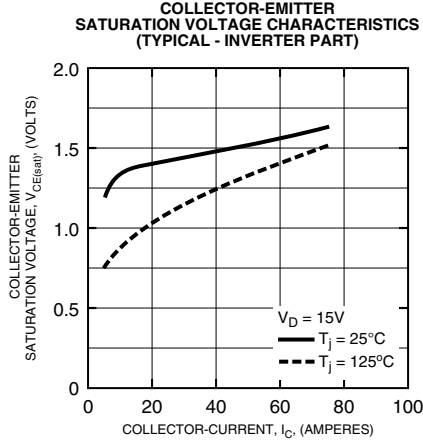
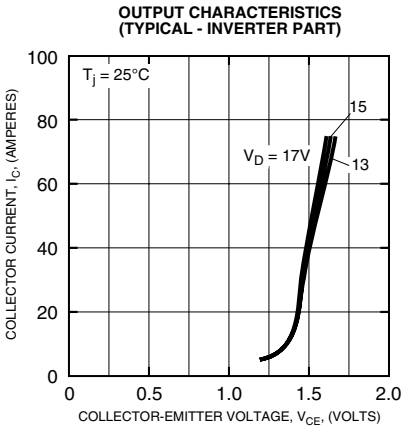


PM75B4LA060 / PM75B4LB060

Photo Voltaic IPM


H-Bridge

75 Amperes/600 Volts

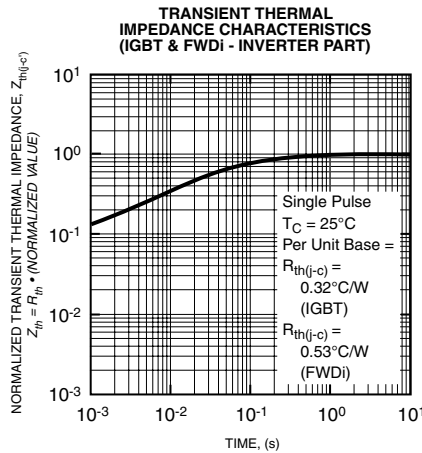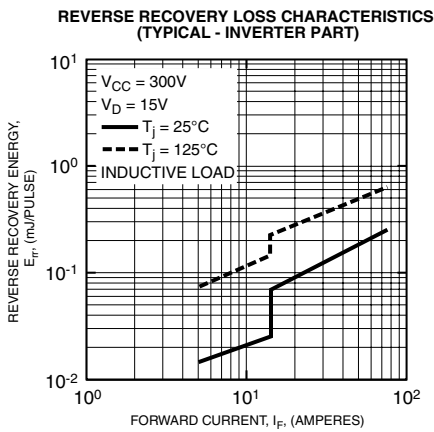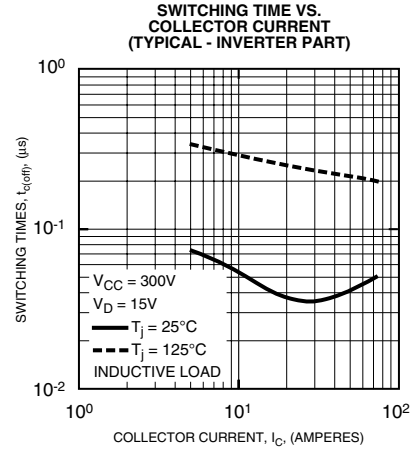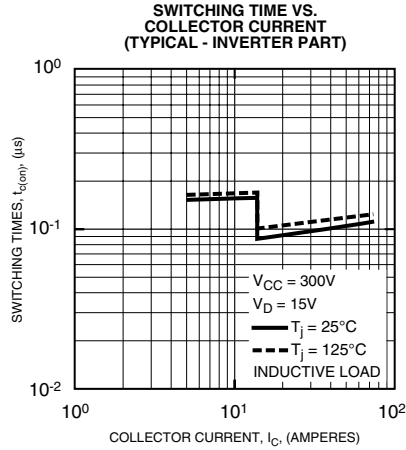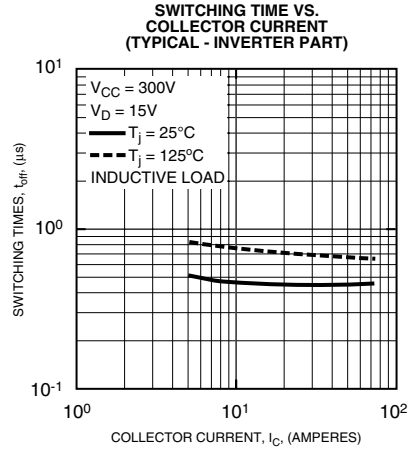

Note 1: T_C (under the chip) Measurement Point

Package A

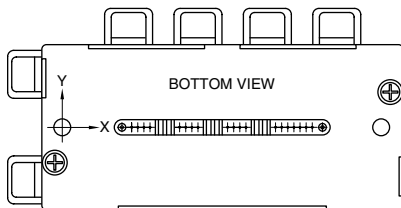

Package B

