


# HRCI Industrial Ceramic Body Fuses

## Dimensional Data

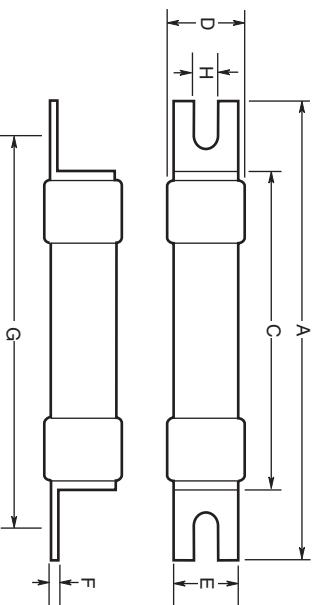

**CIF21**  
**HRCI-CA Bolt-On Mounting**  
**Ampere Ratings:** 1-30A  
**Voltage Rating:** 600Vac; 250Vdc  
**Interrupting Rating:** 200,000A RMS  
 Symmetrical  
**Agency Information:** CSA C22.2  
 No. 106-M92

- Provides both overload and short-circuit protection to HRCI requirements.
- Offset blades for bolt-on mounting.
- CIF21 fuse fits the Bussmann-Camaster Fuseholder.


☑ CE logo denotes compliance with European Union Low Voltage Directive (50-1000Vac, 75-1500Vdc). Refer to Data Sheet: 8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.

Type	Catalog Symbol	Current Ratings	Dimensions in Inches and (mm)						
			Overall		Mounting		Body		
			A	E	F	G	H	C	D
HRCI-CA	(AMP) CIF21	1, 3, 10, 15, 20, 25, 30	2.15 (54.50)	.44 (11.10)	.03 (0.81)	1.75 (44.50)	.19 (4.70)	1.44 (35.50)	.54 (13.80)

Data Sheet: 4127



## Dimensional Data

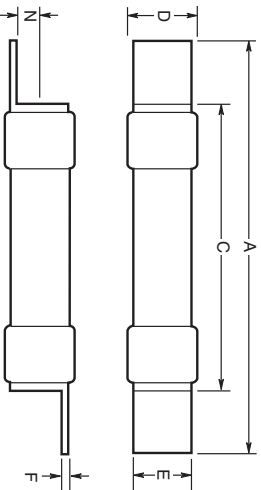

- Industrial miniature fuse with offset blades for clip-in mounting.
- Ground ceramic body with plated endcaps.
- Provides both short-circuit and overload protection.
- CIF06 fits the 30A SafelOC fuseholder.
- EK fits the 60A SafelOC fuseholder.

**CIF06 & EK**  
**HRCI-CB Clip-In Mounting**  
**Ampere Ratings:** CIF06: 1-30A, EK: 35-60A  
**Voltage Rating:** 600Vac; 250Vdc  
**Interrupting Rating:** 200,000A RMS Symmetrical  
**Agency Information:** CSA C22.2 No. 106-M92

☑ CE logo denotes compliance with European Union Low Voltage Directive (50-1000Vac, 75-1500Vdc). Refer to Data Sheet: 8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.

Type	Catalog Symbol	Current Ratings	Dimensions in Inches and (mm)					
			A	E	F	N	C	D
HRCI-CB	(AMP) CIF06	1, 10, 15, 20, 25, 30	2.38 (60.40)	.50 (12.70)	.03 (0.81)	.14 (3.50)	1.44 (35.50)	.54 (13.80)
	EK (AMP)	30, 35, 40, 50, 60	2.65 (67.30)	.58 (14.80)	.05 (1.22)	.14 (3.50)	1.44 (36.30)	.8 (21.40)

Data Sheet: 4128

192

For complete specification data, call Bussmann Information Fax ~ 636-527-1450

