CASE FINISH	CURRENT (AMPS)	WORKING VOLTAGE				MAXIMUM DC RESISTANCE (OHMS)	MAXIMUM VOLTAGE DROP		MINIMUM CAPACITANCE (uF)	MIN. INSERTION LOSS PER MIL-STD-220, FULL LOAD, +25°C												
		-55°C TO +85°C		-55°C TO +125°C						30 KHz	100 KHz	150 KHz	200 KHz	300 KHz	500 KHz	1 MHz	2 MHz	5 MHz	10 MHz	100 MHz	1 GHz	10 GHz
		AC	DC	AC	DC		DC	AC														
SOLDER	10	–	80	–	28	0.005	0.050	–	1.4	15	--	28	--	31	--	42	--	--	56	--	70	--

PART MARKING:

M15733/24-0008
OLSP2 DATE CODE
C 28VDC 10A 125°C
51-444-060

PACKAGE MARKING:

STANDARD

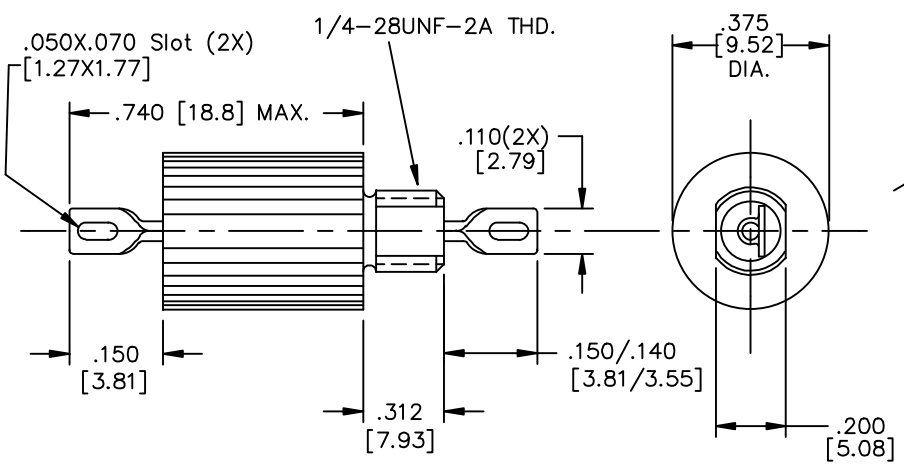

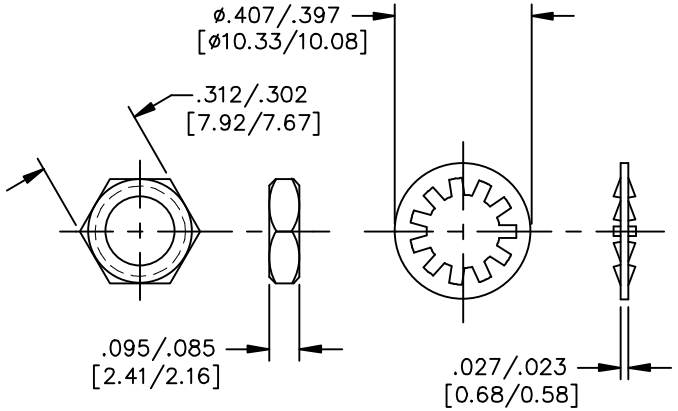

MTG. HARDWARE

MARKING NOTES:

N/A

SCHEMATIC



NOTES:

1. MOUNTING TORQUE NOT TO EXCEED 7in-lbs.
2. (34) THIS PART CODED "NCA". API TECHNOLOGIES DOES NOT HAVE CHANGE AUTHORITY. CUSTOMER APPROVAL REQUIRED BEFORE PRODUCT/PROCESS CHANGES CAN BE MADE.

REV. NO.	CHANGE NOTICE
34	CN 64792-ENG
33	CN 184310
32	CN 180376
31	CN. 179178

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. [MILLIMETERS]
DO NOT SCALE.

TOLERANCES UNLESS OTHERWISE SPECIFIED
Fractions ±
Dec. .xx±
Dec. .xxx± .010
Angles ±0° 30'
CODE IDENT. NO. OLSP2

api technologies corp. FAIRVIEW PENNSYLVANIA

Dwn. KAUFFMAN
Ckd. 7-25-12
Apvd.
Sheet 1 of 1

Description Low Pass EMI Filter

51-444-060

Quality Products From The Specialists In Electro-Magnetic Compatibility