

# C5750X7T2W105M250KE

TDK Item Description : C5750X7T2W105MT\*\*\*S



## Application & Main Feature

Commercial Grade ( Soft Termination )

## Series

C5750 [EIA CC2220]



## Dimensions

L	5.70mm +0.5,-0.4mm
W	5.00mm +/-0.4mm
T	2.50mm +/-0.3mm
B	0.20mm Min.
G	

## Temperature Characteristic

X7T (-55 to 125 degC +22,-33%)

## Rated Voltage

2W (450Vdc)

## Capacitance

1uF

## Capacitance Tolerance

M (+/-20%)

## Dissipation Factor

2.5% Max.


## Insulation Resistance

500Mohm Min.


## AEC-Q200

Not Applicable


**|Z|, ESR vs. Freq. Characteristics  
(Simulation Data)**

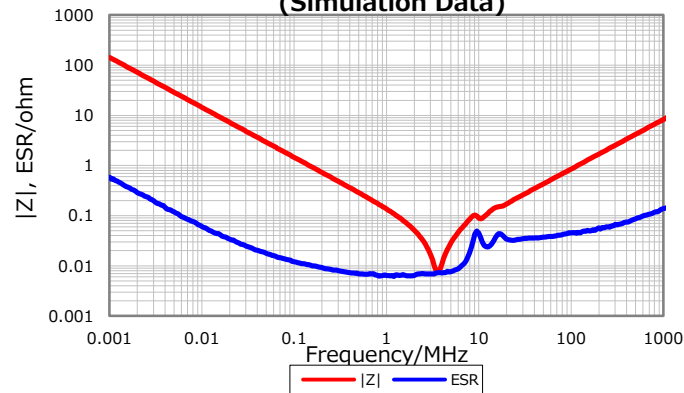


**Cap. vs. Freq. Characteristic**

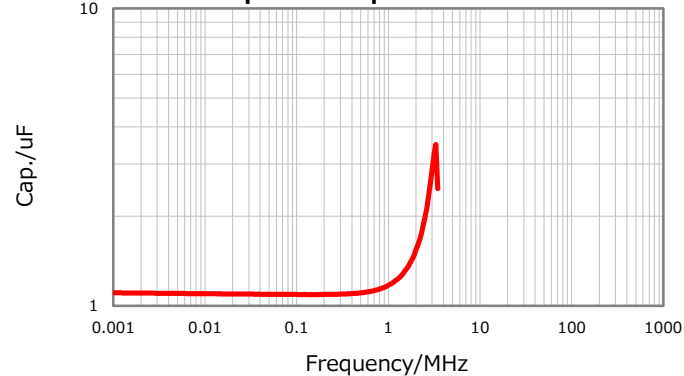


**DC Bias Characteristic**

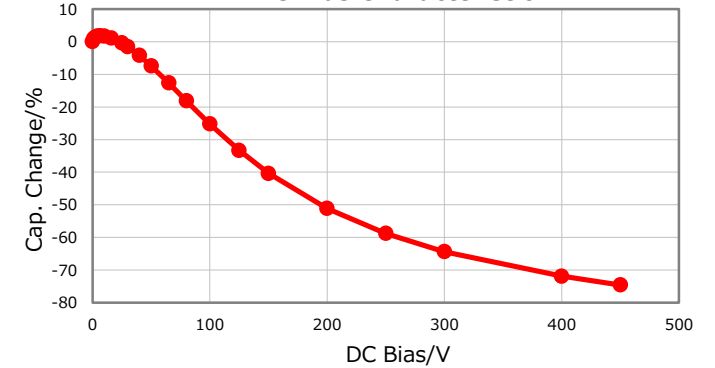

**Temperature Characteristics**

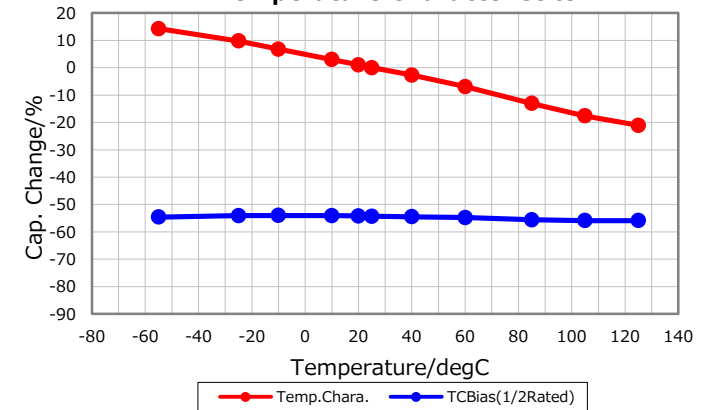

**Ripple Temperature Rise Characteristics**

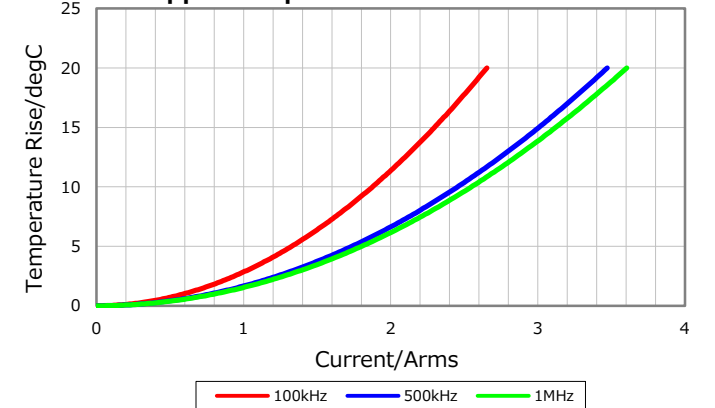

Characterization Sheet ( Multilayer Ceramic Chip Capacitors )



All specifications are subject to change without notice.

March 16, 2017