


.188[4.78] HEX. SILVER PLATED BRASS BUSHING



CAPACITANCE	.05uF GMV
TEMP. RANGE	-40°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	85°C 100 VDC 125°C 70 VDC
IL=PER MIL-STD-220, @25°C N/L 60db @ 10MHz	
I.L. PER MIL-STD-220	
FREQ. MHz	I.L. (db)
1	15
10	60
100	75
1 GHz	75
10 GHz	75

SCHEMATIC

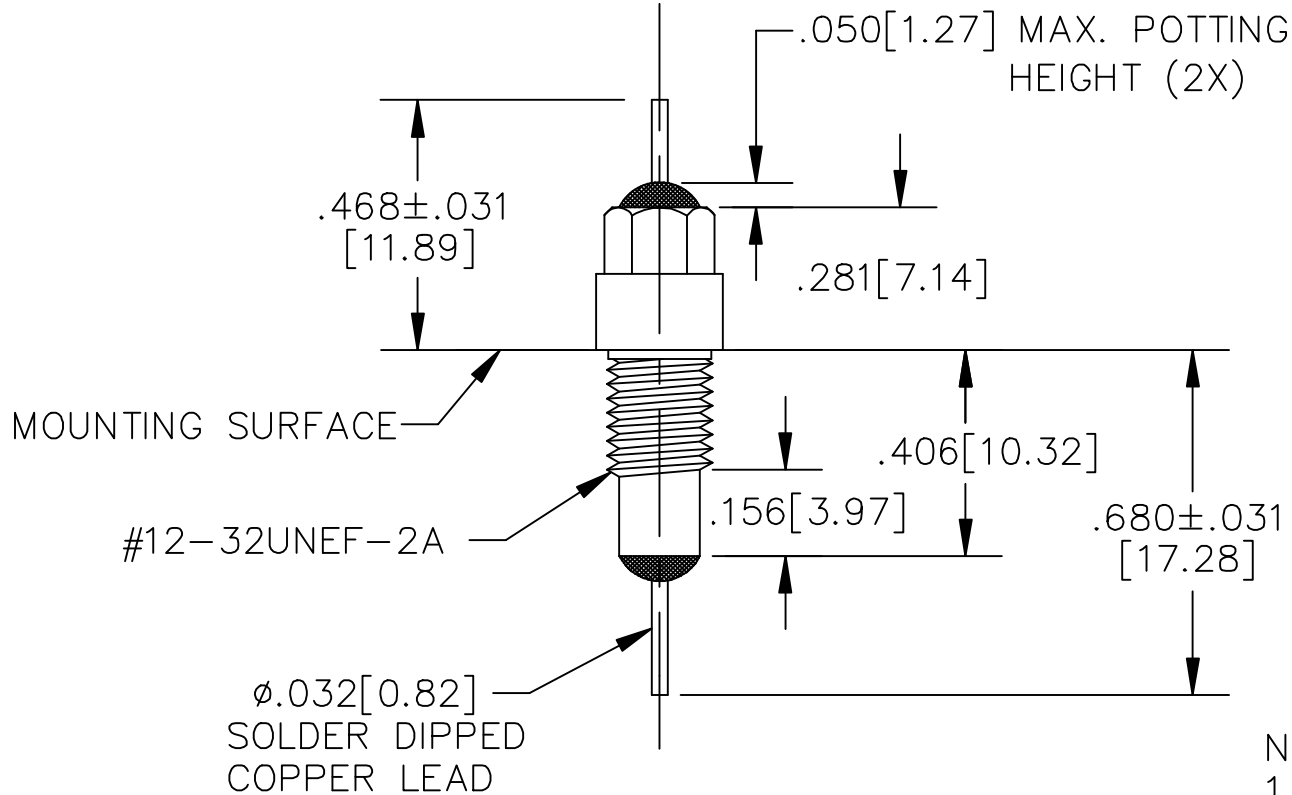

MARKING:

PART: S 1216-001
 BAG: 1216-001
 DATE CODE
 LOT #
 QTY./BAG (100 MAX.)

NOTE:

1. SUGGESTED MTG. HOLE φ.221
2. HARDWARE IS INCLUDED

	10	9	8	7	6	5	4	3	2	1	0
	CN 201643	CN 201433	CN 192782	CN 184996	CN 155235	CN 149664	CN 148888	CN 148903	CN 148210	CN 146693	CN 146192
	REDRAWN			UPDATED							

REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED
CHANGE NOTICE	Fractions ± 1/64
	Dec. .xx±
	Dec. .xxx± .010
	Angles ±0° 30'
CODE IDENT. NO.	OLSP2

 SPECTRUM CONTROL INC.	ERIE, FAIRVIEW PENNSYLVANIA	
	Dwn. J.KAUFFMAN Ckd. 5/14/01 Apvd. Scale NONE	Description FILTER, SING, PI, BSHG 1216-001