

C0816X5R1C473M050AC

TDK Item Description : C0816X5R1C473MT****



Application & Main Feature

Commercial Grade (Low ESL Reverse Geometry)

Series

C0816 [EIA CC0306]



Dimensions

L 0.80mm +/-0.1mm
 W 1.60mm +/-0.1mm
 T 0.50mm +/-0.1mm
 B 0.10mm Min.

Temperature Characteristic

X5R (-55 to 85 degC +/-15%)

Rated Voltage

1C (16Vdc)

Capacitance

47nF

Capacitance Tolerance

M (+/-20%)

Dissipation Factor

5% Max.


Insulation Resistance

2.13Gohm Min.


AEC-Q200

Not Applicable


DC Bias Characteristic

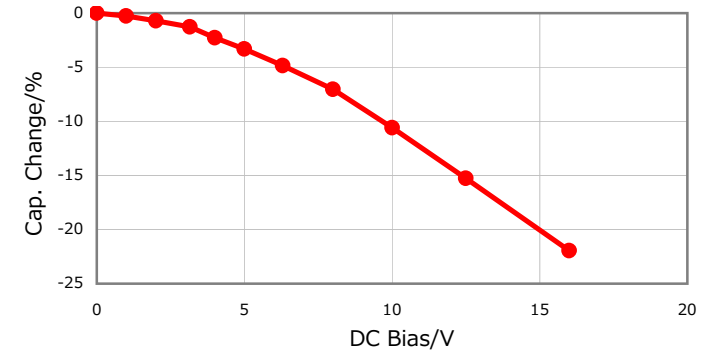


|Z|, ESR vs. Freq. Characteristics

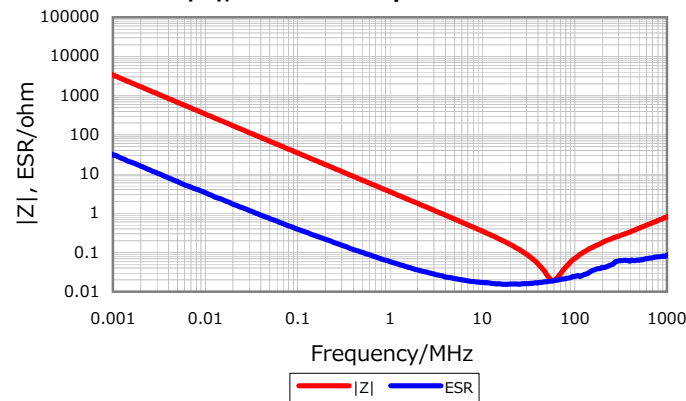


Temperature Characteristics

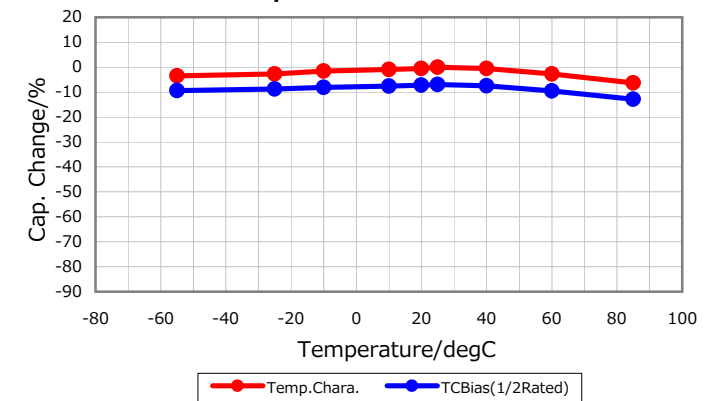

Cap. vs. Freq. Characteristic

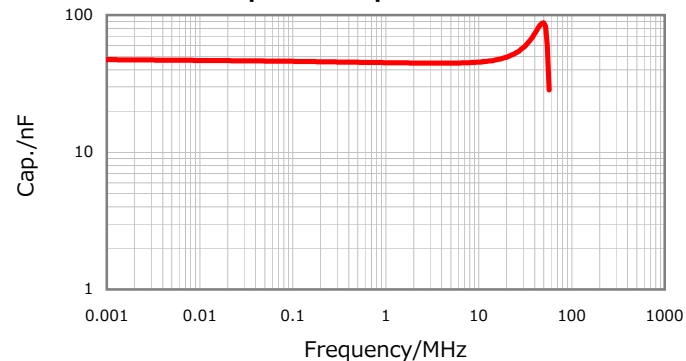

Ripple Temperature Rise Characteristics

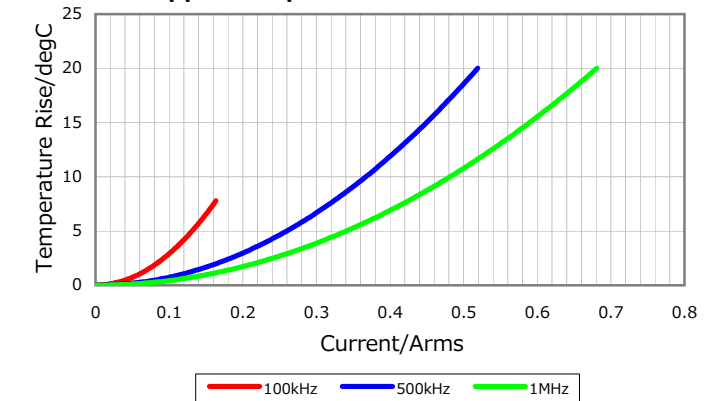

Characterization Sheet (Multilayer Ceramic Chip Capacitors)



All specifications are subject to change without notice.

January 3, 2016